


# SENSO RUSTIC 6'



0767 - Pure Oak Gris



0764 - Nutti



# LVT SELF-ADHESIVE PLANKS

Class. 22



1

## 1-Muscade

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0306 - EAN: 3475710247491  
BD : Size: 91.4 x 15.2 cm  
Code: 3327 0306 - EAN: 3475710250408



2

## 2-Noisette

BD : Size: 91.4 x 15.2 cm  
Code: 3327 0311 - EAN: 3475710250392



3

## 3-Cacao

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0307 - EAN: 3475710247521



4

## 4-Kola

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0309 - EAN: 3475710247538



5

## 5-Pecan

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0511 - EAN: 3475710247514  
BD : Size: 91.4 x 15.2 cm  
Code: 3327 0511 - EAN: 3475710250385



6

## 6-White Pecan

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0394 - EAN: 3475710304651



7

## 7-Nutti

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0764 - EAN: 3475710374180



8

## 8-Hielo

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0657 - EAN: 3475710392191



9

## 9-Pure Oak Gris

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0767 - EAN: 3475710392207



10

## 10-Fishbone

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0777 - EAN: 3475710391002



11

## 11-Fishbone Foncé

AS : Size: 91.4 x 15.2 cm  
Code: 3325 0778 - EAN: 3475710391019

NEW



# SENSO RUSTIC AS 7.25"



0722 - Dandy Natural



# LVT SELF-ADHESIVE PLANKS

Class.22



1



2



3



4



5



6

## 1-Story Brown

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0646 - EAN: 3475710320224

## 2-Pecan

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0511 - EAN: 3475710336546

## 3-Hudson Perle

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0697 - EAN: 3475710336560

## 4-Dandy Natural

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0722 - EAN: 3475710355004

## 5-Ginger

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0721 - EAN: 3475710354991

## 6-Candlenut

AS : Size: 91.4 x 18.4 cm  
Code: 3378 0355 - EAN: 3475710336553



# SENSO NATURAL 6'



O413 - Lord





# SENSO NATURAL



7



8



0397 - Night Slate

## 1-Columbia

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0347  
EAN: 3475710391088

## 2-Lord

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0413  
EAN: 3475710265976

## 3-Oak Pine

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0296  
EAN: 3475710247910

## 4-Noyer Naturel

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0018  
EAN: 3475710235238

## 5-Beech Honey

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0323  
EAN: 3475710247965

## 6-Merbau Exotic

VS : Size: 91.4 x 15.2 cm  
Code: 3280 0019  
EAN: 3475710235245

## 7-Travertin

VS : Size: 30.5 x 60.9 cm  
Code: 3374 0201  
EAN: 3475710320385

## 8-Night Slate

VS : Size: 30.5 x 60.9 cm  
Code: 3374 0397  
EAN: 3475710319419





# SENSO URBAN 6'



0315 - Whitetech



## 1-Whitetech

VS : Size: 91.4 x 15.2 cm

Code: 3285 0315 - EAN: 3475710234705

## 2-Ceruse Blanc

VS : Size: 91.4 x 15.2 cm

Code: 3326 0301 - EAN: 3475710247897





# SENSO URBAN



1



2



3

0702 - Wallstreet Light

### 1-Rockfell Ash

VS : Size: 30.5 x 60.9 cm

Code: 3375 0732 - EAN: 3475710355264

### 2-Subway

Size: 30.5 x 60.9 cm

Code: 3375 0636 - EAN: 3475710320071

### 3-Wallstreet Light

Size: 30.5 x 60.9 cm

Code: 3375 0702 - EAN: 3475710391095





# SENSO

## TECHNICAL CHARACTERISTICS

			Planks	Tiles
<b>DESCRIPTION</b>				
Total thickness	EN ISO 24346 (EN 428)	mm	2.00	2.00
Thickness of the wear layer	EN ISO 24340 (EN 429)	mm	0.20	0.20
Weight / Mass per unit area	EN ISO 23997 (EN 430)	g/sqm	3920	3425
Size	EN ISO 24342 (EN 427)	cm	91.4 x 15.2 91.4 x 18.4	30.5 x 60.9
Plank or tiles per box	-	planks / tiles	16	12
Area per box	-	sqm	2.20 (91.4 x 15.2) 2.69 (91.4 x 18.4)	2.22

### CLASSIFICATION

Norm / Product specification	-	EN 649	EN 649	EN 649
European classification	EN ISO 10874 (EN 685)	class	22	22
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propretity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9

### PERFORMANCE

Wear Group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999 (EN 434)	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1 (EN 433)	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456 (EN 12524)	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 100	< 250
VOC rating (French norm)	-	-	A+	A+

### CE MARKING



EN 14041



**Areas of use:** domestic use



Laying video





#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- ISO 14001
- Soapy water cleaning

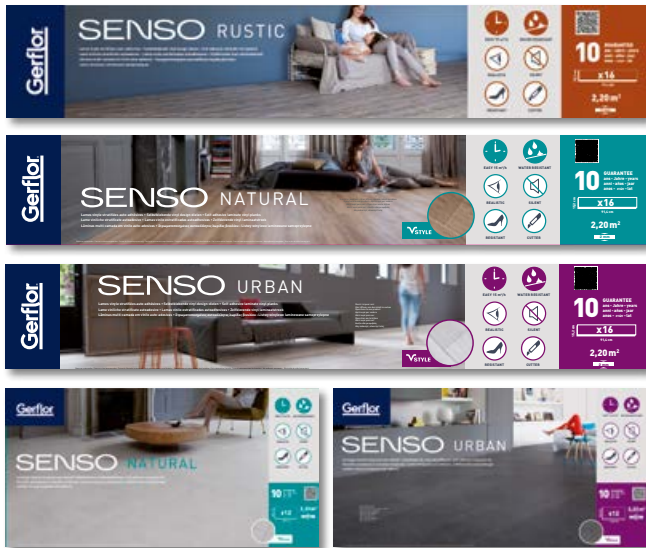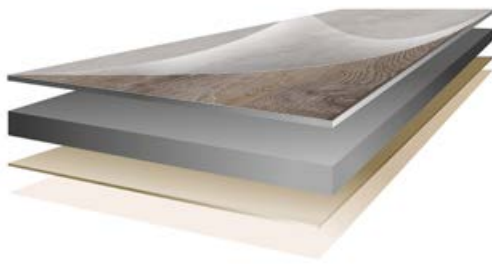

## LAYING

### Installation by subfloor type

#### SMOOTH

Smooth cement that is clean and dry, seamless tiles, liquid screed  
= Can be installed directly

#### UNEVEN

##### Cement, floorboards, tiles

- Securing of loose/exposed parts
- Resurfacing required (wood fibres)
- Sanding

##### SOFT and LOOSE LAY

##### Carpet, vinyl, linoleum, laminate

- Removal of old subfloor and underlayer
- Resurfacing
- Sanding

#### IMPOSSIBLE CASES

Heated floor if > 28°C and/or reversible, oriented strand board (OSB), verandas, cracked floors, humidity buildup

#### TIP

For better adherence, apply Gerflor primer after the subfloor has been sanded, cleaned and vacuumed, before installing the tiles or planks

#### Step-by-step

- 1- You will need a utility knife, ruler and tape measure
- 2- Start at the centre of the piece
- 3- Follow the instructions on the back
- 4- Remove protective covering
- 5- Position the piece and press down

## CLEANING & CARE

### Cleaning - see page 54

#### To replace a tile or plank

- With a utility knife, pierce the tile or plank several times
- Heat it with a blow dryer to soften it
- Remove and replace it

# SENSO

## ULTRA-REALISTIC

- 4 bevelled edges
- Textured surface

## TRENDY

- 3 styles that reflect consumers taste

## INSTALLED QUICKLY AND EASILY

- No glue, no joints, no spacers
- Can be cut with a utility knife
- Dust-free
- 15 m<sup>2</sup> (160 sq. ft.) per hour

## PRIMER PERFORMANCE



- Effective lasting adhesion to all Gerflor self-adhesive products
- Regulates porosity, improves tiles & planks adhesion
- Easy to use : roller application
- Odourless : no solvents

1 kg : 0974 0001 - 3 kg : 0970 0001

6x1 kg : 0572 0001 - 4x3 kg : 0571 0001