







RECREATION

**Gerflor**<sup>®</sup>  
theflooringgroup


All Gerflor experience for a highly performing recreational floor: environmental friendly, low VOC, no solvent, no heavy metal and 100% recyclable suitable for leisure and sports activities.

# RECREATION 45







6563 Menta

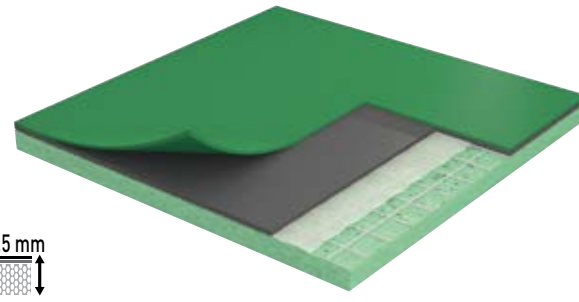


4.5 mm

# RECREATION 60



2402 Azul

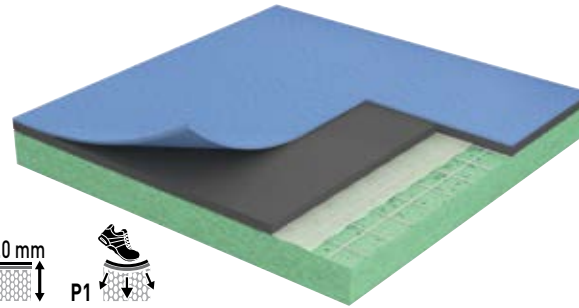

6.0 mm



6062 Canadian Maple



6058 American Oak



6563 Menta



6160 Naranja



6556 Verde



6154 Roja




2402 Azul



2711 Gris



6614 Oceano\*

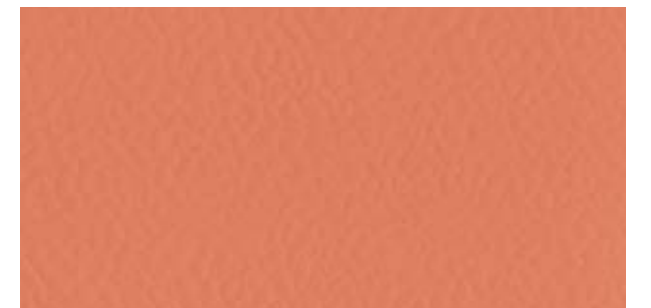

6157 Rosa\*

\* Only available in Recreation 60





Y1000277

## RECREATION

PRODUCT DESCRIPTION DESCRIPCIÓN DEL PRODUCTO ОПИСАНИЕ	Standard / Norma / Стандарт	Requirement / Requisito / Требование	Units / Unidades / Единицы	RECREATION 45	RECREATION 60
Surface treatment / Tratamiento de superficie / Обработка поверхности	-	-	-	PUR PROTECT	PUR PROTECT
Surface complex / Complejo de superficie / Состав поверхности	-	-	-	100% PVC	
Foam / Espuma / Вспененная подложка	-	-	-	Closed cell foam / Espuma de celdas cerradas / Упорядоченная структура ячеек	
Thickness / Espesor / Толщина	EN 428	-	mm	4.5	6.0
Weight / Peso / Вес	EN 430	-	kg/m <sup>2</sup>	2.6	3.7
Length / Largo / Длина	EN 426	-	lm	20.5	20.5
Width / Ancho / Ширина	EN 426	-	lm	1.5	1.5

## SPORT PROPERTIES CARACTERÍSTICAS DEPORTIVAS / СПОРТИВНЫЕ ХАРАКТЕРИСТИКИ

Shock absorption / Amortiguación / Амортизация ударов	EN 14808	≥ 25	%	≤ 25	≥ 25 (P1)
Vertical deformation Deformación vertical / Вертикальная деформация	EN 14809	≤ 3.5	mm	≤ 3.5	≤ 3.5
Sliding coefficient / Coeficiente de deslizamiento / Коэффициент скольжения	EN 13036-4	80 - 110	-	80 - 110	80 - 110
Ball bounce / Rebote de balón / Отскок мяча	EN 12235	≥ 90	%	≥ 90	≥ 90

## TECHNICAL CHARACTERISTICS CARACTERÍSTICAS TÉCNICAS / ЭКСПЛУАТАЦИОННЫЕ ХАРАКТЕРИСТИКИ

Abrasion resistance / Resistencia a la abrasión / Износостойкость	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350
Impact resistance / Resistencia al impacto / Ударопрочность	EN 1517	≥ 8	N/m	≥ 8	≥ 8
Indentation resistance / Resistencia al punzonamiento / Остаточные впадины	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5
Impact sound isolation / Insonorización acústica / Звукоизоляция	EN ISO 717 -2	-	dB	17	18

## CLASSIFICATION / CLASIFICACIÓN / КЛАССИФИКАЦИЯ

Fire / Fuego / Огнестойкость	EN 13501-1	-	-	Cfl-s1	Cfl-s1
Antibacterial activity (E. coli - S. aureus - MRSA)* / Actividad antibacteriana* / Антибактериальная активность* /	ISO 22196	-	-	> 99% inhibits growth Inhibe el crecimiento en un 99% 99% Подавление роста бактерий	> 99% inhibits growth Inhibe el crecimiento en un 99% 99% Подавление роста бактерий

\* The implementation of an effective cleaning method is the best defence against infection.  
\* La mejor defensa contra la infección es la implementación de un método efectivo de limpieza.  
\* Метод эффективной чистки - лучшая защита против инфекции

**GERFLOR INTERNATIONAL**

Tel.: +33 (0) 4 74 05 40 00

Fax.: +33 (0) 4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

## WE CARE | WE ACT. Our commitments for a sustainable future



**CARBON  
FOOTPRINT\***

-20 % kg  
CO<sub>2</sub> equivalent/m<sup>2</sup>  
between 2020 and 2025



**BIOSOURCED  
CONTENT\*\***

10 % by 2025



**RECYCLED  
CONTENT**

30 % by 2025



**ADHESIVE  
FREE\*\*\***

35 % by 2025



**ANNUAL VOLUME  
RECYCLED**

60,000 t by 2025

\* Scopes 1 & 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity with adhesive free solutions

# Gerflor®