

TARALAY LIBERTEX




LOOSELAY ROLLS - COMMERCIAL APPLICATIONS

gerflor.com



Gerflor[®]
theflooringgroup

ALL TARALAY BENEFITS ...

HYGENIC & EASY MAINTENANCE	HIGH TRAFFIC RESISTANCE	COMFORT
	 <p>34</p>	 <p>19 dB</p>
PROTECSOL® SURFACE TREATMENT	0,7mm WEARLAYER	MAX 3 LAYER SYSTEM



MAX 3

INNOVATIVE 3-LAYER SYSTEM

- 1 High density foam complexed with fiber glass
- 2 Acoustic foam layer
- 3 Reinforced textile backing

... WITH FAST TRACK INSTALLATION

MINIMAL SUBFLOOR PREPARATION	NO SHUTDOWN	NO DRY TIME
		
INSTALLATION ON EXISTING OR UNEVEN SUBFLOORS	NO ODOR, NO GLUE, MINIMUM FACILITY DOWNTIME	LOOSELAY SOLUTION

FAST INSTALLATION IN ONE SOLUTION !



- 
ADHESIVE FREE
 Apply double-sided tape (such as Fix & Free 100 - ref 058U) on welding area and on room edges
- 
HOT WELDING
 for 100% watertight hygienic system (ref CR40 0585)
- 
COLD WELDING
 for invisible joint (see Romus #95605)
- 
WALL TRANSITION
 • Vynaflex skirtings, ideal for commercial applications (H 60 mm - ref 0483 / H 80 mm - ref 0482 / H100 mm - ref 0477)
 • Coving for 100% watertight hygienic system
- 
ENTRANCE MATS
 A new quick & easy installation of entrance mats with Quickmat Tile (ref 1725)

More information on gerflor.com



TEXTILE BACKING
PATENTED GERFLOR

UNEVEN SUBFLOORS

COMPACT FLOORS

ASBESTOS

TILES



YOUR SUSTAINABLE FLOORING SOLUTION!


CIRCULAR ECONOMY

- 100% RECYCLABLE PRODUCT
- RECYCLED CONTENT: backing made with recycled PET



INDOOR AIR QUALITY

ADHESIVE FREE INSTALLATION MEANS VIRTUALLY NO VOC!

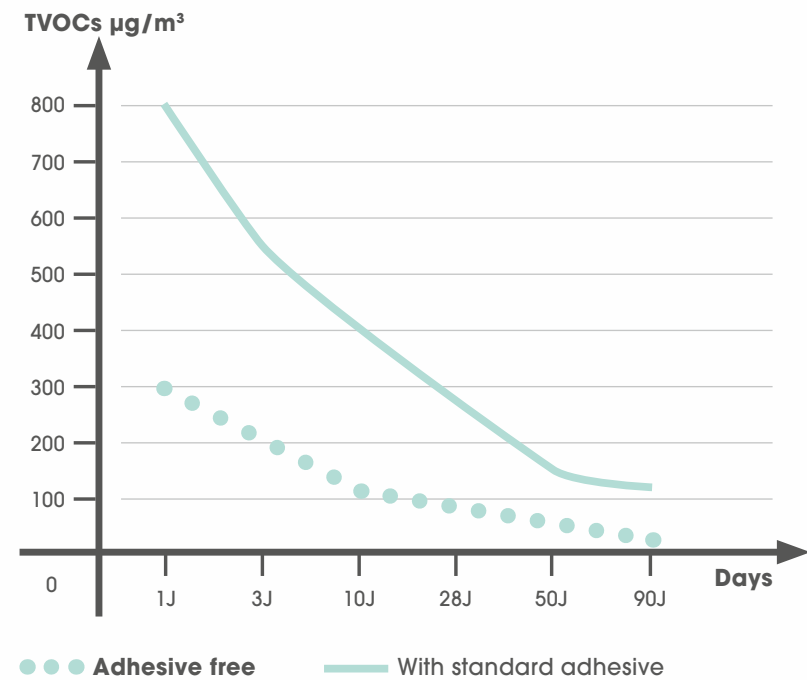

2243 - LEGEND Chestnut
NCS: S3010-Y30R / LRV: 31

No plank Continuous design



2245 - SKANDI OAK Natural
NCS: S3010-Y40R / LRV: 28

20x133,3 cm



0720 - PURE OAK Clear
NCS: S2010-Y40R / LRV: 31

16x100 cm



2242 - LEGEND Country
NCS: S4020-Y20R / LRV: 26

No plank Continuous design




2246 - SKANDI OAK Toffee
NCS: S4010-Y50R / LRV: 25

20x133,3 cm




2244 - SKANDI OAK Clear
NCS: S2005-Y50R / LRV: 43

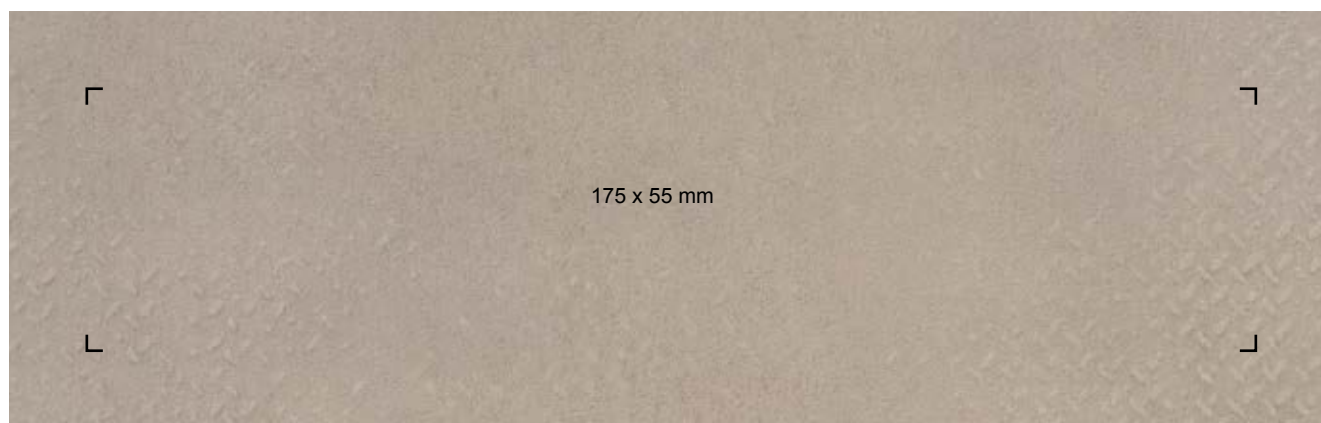


1785 - REFLECT Earth
NCS: 4010-R10B / LRV: 32



2241 - COCOON Silver Brown
NCS: 4502-R / LRV: 34

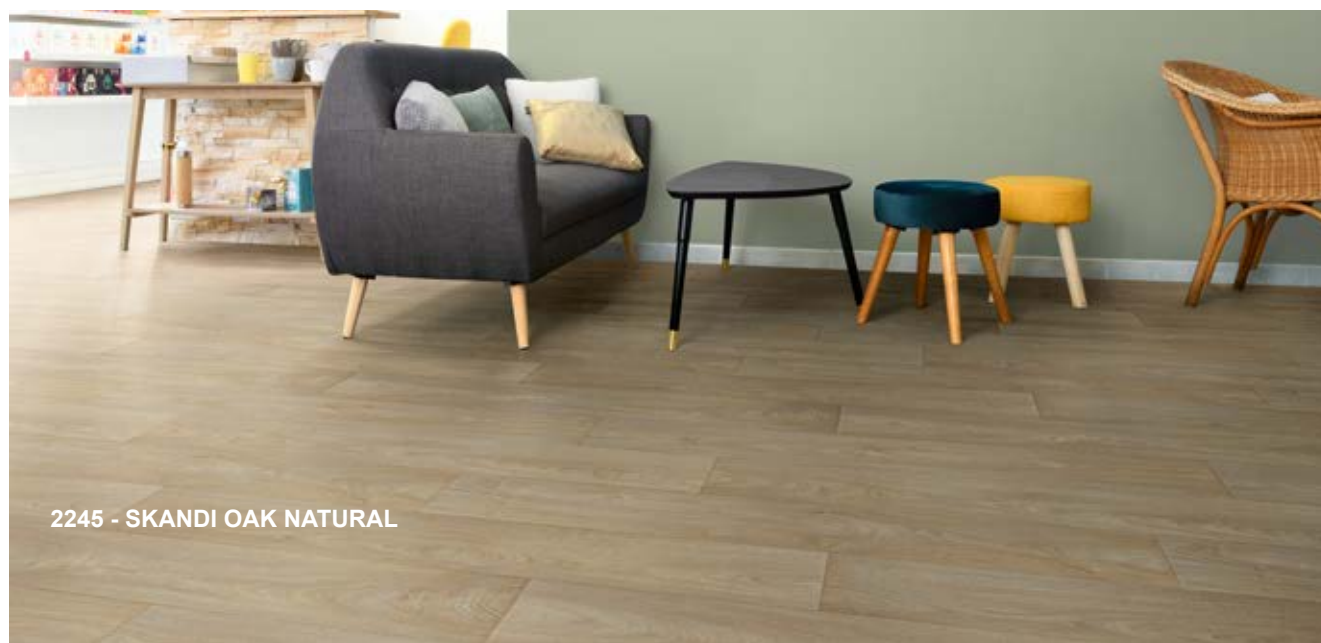

2245 - SKANDI OAK NATURAL

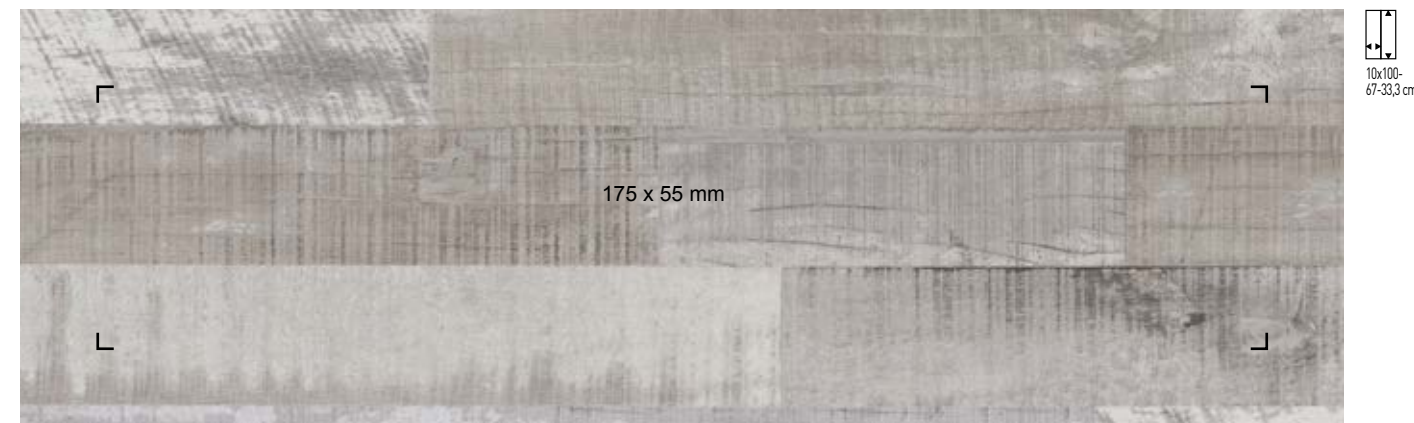

2247 - HOSSEGOR Latte
NCS: 3005-Y80R / LRV: 38



1430 - LEGEND Grey
NCS: 4005-Y80R / LRV: 31



1751 - PURE OAK Grey
NCS: S3500N / LRV: 20




1751 - PURE OAK GREY




2248 - PAROS Clear
NCS: S2502-Y / LRV: 43




2250 - REFLECT Forest
NCS: 1050-G30Y / LRV: 43

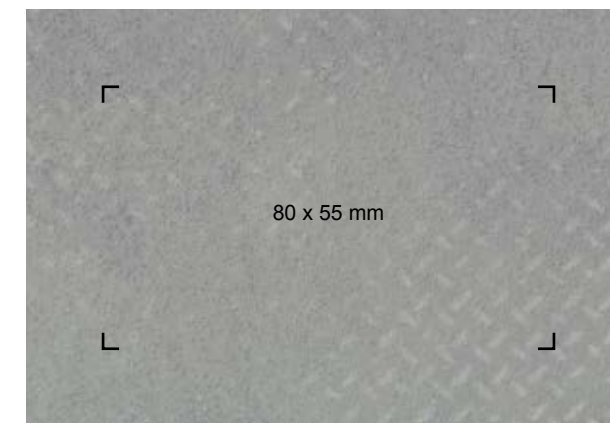


2253 - REFLECT Silver
NCS: 4005-R20B / LRV: 31

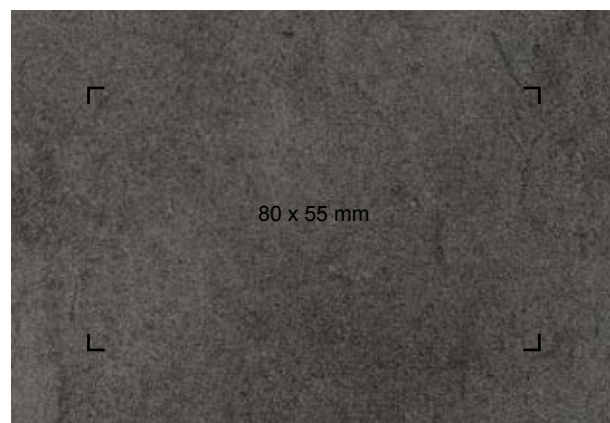

2153 - AMSTERDAM Anthracite
NCS: S6502-Y / LRV: 12

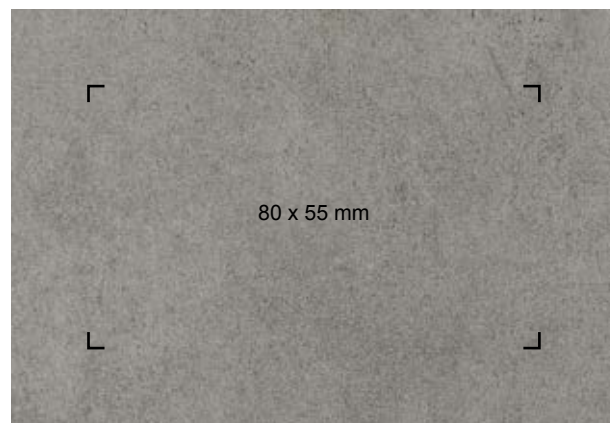

2152 - AMSTERDAM Grey
NCS: S4502-Y / LRV: 26

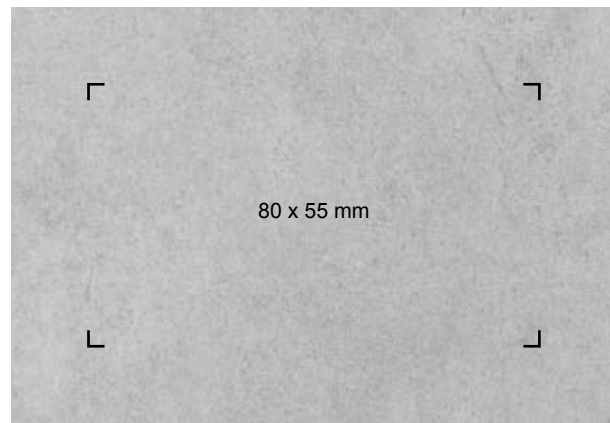

2151 - AMSTERDAM Light Grey
NCS: S-2500N / LRV: 39



2249 - REFLECT Sea
NCS: 3040-R90B / LRV: 24



2251 - REFLECT Sunny
NCS: 2040-Y70R / LRV: 28



2252 - REFLECT Flower
NCS: 3040-R20B / LRV: 18



2253 - REFLECT SILVER / 2252 - REFLECT FLOWER



TARALAY LIBERTEX

DESCRIPTION

Total thickness	EN ISO 24346	mm	3.65
Wearlayer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m ²	2900
Width of sheet	EN ISO 24341	cm	200 / 400
Length of sheet	EN ISO 24341	lm	20

CLASSIFICATION

Norm/product specification	-	-	EN 651
European classification	EN ISO 10874	class	34
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	-	R10

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protectsol®
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
Certification	-	-	Floorscore®

CE MARKING

	EN 14041	
--	----------	--

⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages.
See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Gerflor

Be connected!



www.gerflor.com

#Gerflor

TARALAY LIBERTEX: AN ECO-RESPONSIBLE CHOICE

 REACH COMPOSITION 100% REACH	 RECYCLED CONTENT Backing made with recycled PET	 RECYCLABILITY 100%	 INDOOR AIR QUALITY 10 times better than norms requirements (TVOC <100 µg/m ³ after 28 days) Free of formaldehyde	 INSTALLATION No adhesive	 WELLNESS • COMFORT Impact noise reduction: -19dB • SECURITY Anti slip performance R10
---	---	----------------------------------	--	--	--